


This Tank Meets or Exceeds The Requirements of N.J.A.C. 7:9A

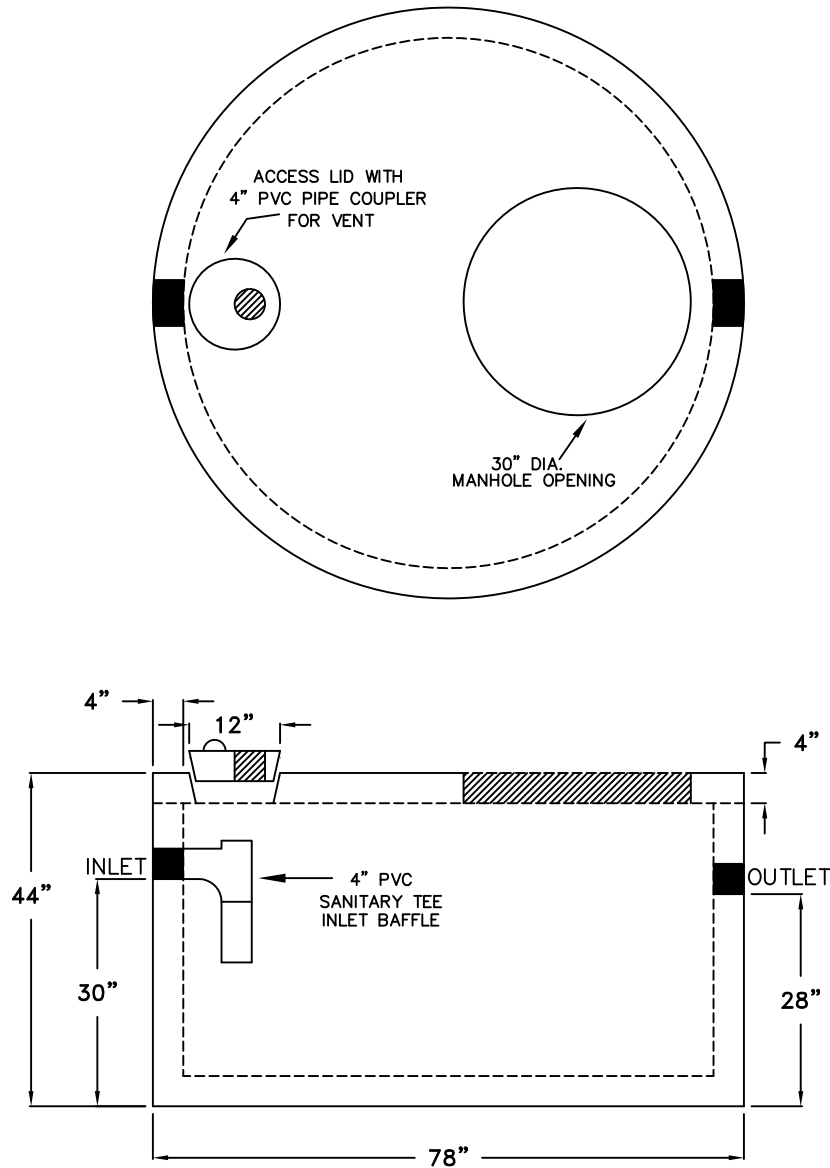

SPECIFICATIONS

SEPTTECH™ NJ 500 GALLON ROUND PUMP TANK

NJ500P-RND

Minimum Concrete Strength - 4000 P.S.I. @ 28 Days
 Reinforcement - #4 Rebar in Top & Bottom; WWF 6X6, 10/10, W1.4/W1.4 in Walls
 Construction Joint - Sealed with Con Seal CS-101 Butyl Resin Sealant

Design - Maximum Earth Cover - 6'

Pump Tank To Be As Manufactured By:

FLEMINGTON PRECAST & SUPPLY, L.L.C.

18 Allen Street, Flemington, NJ 08822-1120

Ph. (908) 782-3246

Fax (908) 782-1981