


Date : 6/1/99

DWG #1250P

FLEMINGTON PRECAST & SUPPLY, L.L.C.

This Tank Meets or Exceeds The Requirements of N.J.A.C. 7:9A

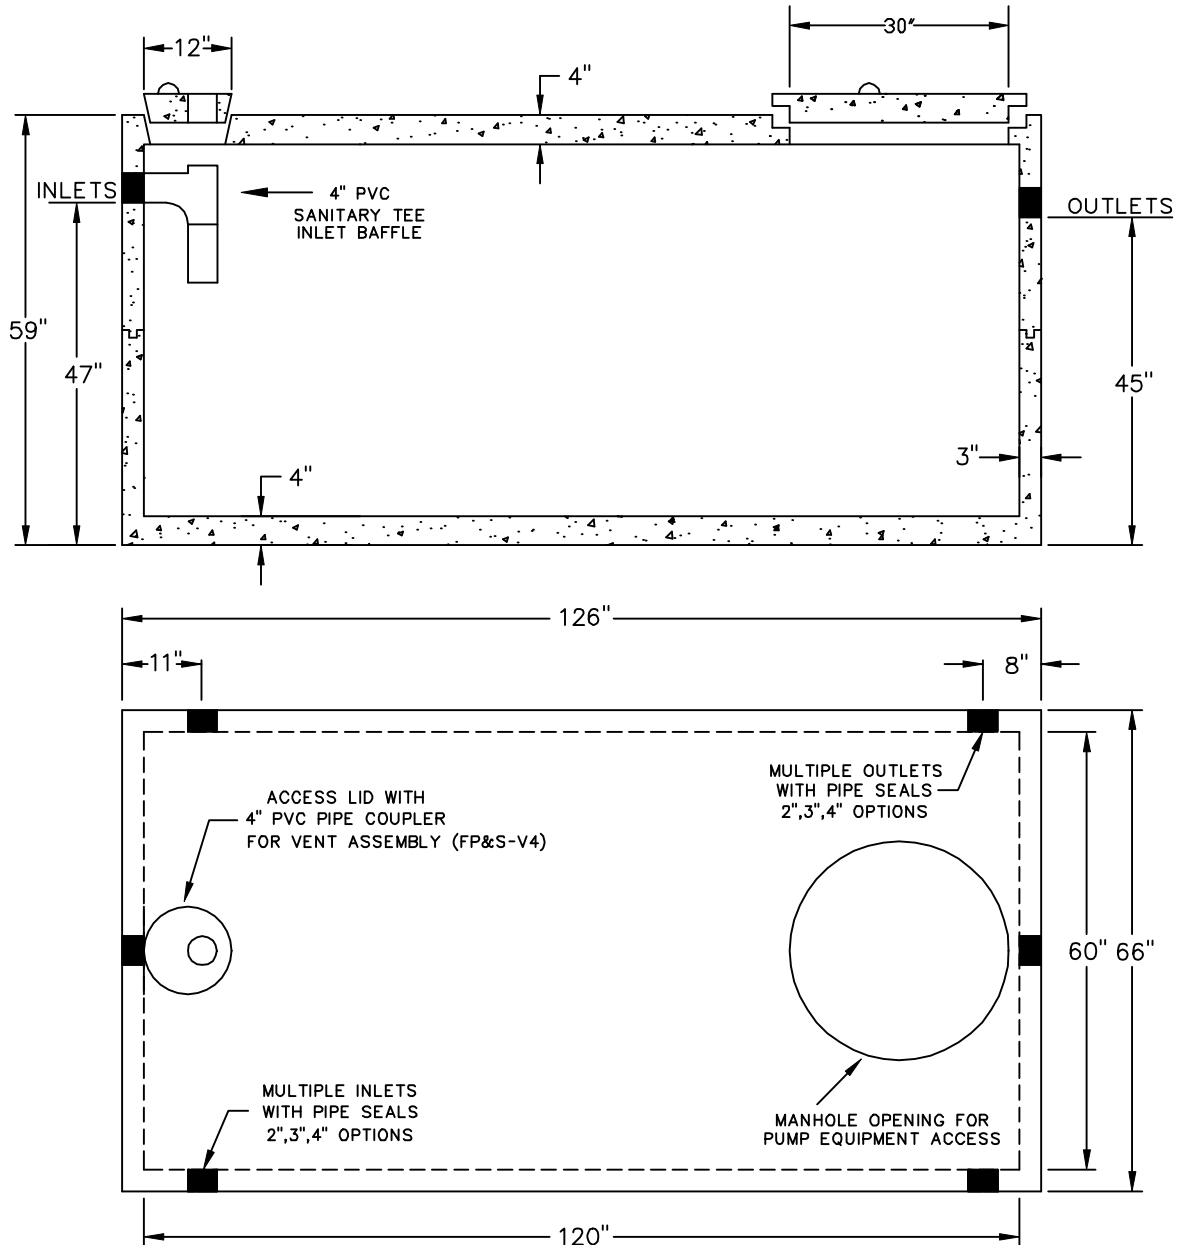

SPECIFICATIONS

SEPTECH™ NJ 1250 GALLON PUMP TANK

NJ1250P

Minimum Concrete Strength – 4000 P.S.I. @ 28 Days
Reinforcement – #3 & #4 Rebar in Top; 6"x6"x10 Ga. wire mesh in Sides & Bottom
Secondary Reinforcement Synthetic Fibers Throughout
Construction Joint – Sealed with Conseal CS-101 Butyl Resin Sealant
Design – Pump Tank to be As Manufactured By:
FLEMINGTON PRECAST & SUPPLY, L.L.C.
18 Allen Street, Flemington, NJ 08822-1120
Ph. (908) 782-3246 Fax (908) 782-1981