


This Tank Meets or Exceeds The Requirements of N.J.A.C 7:9A

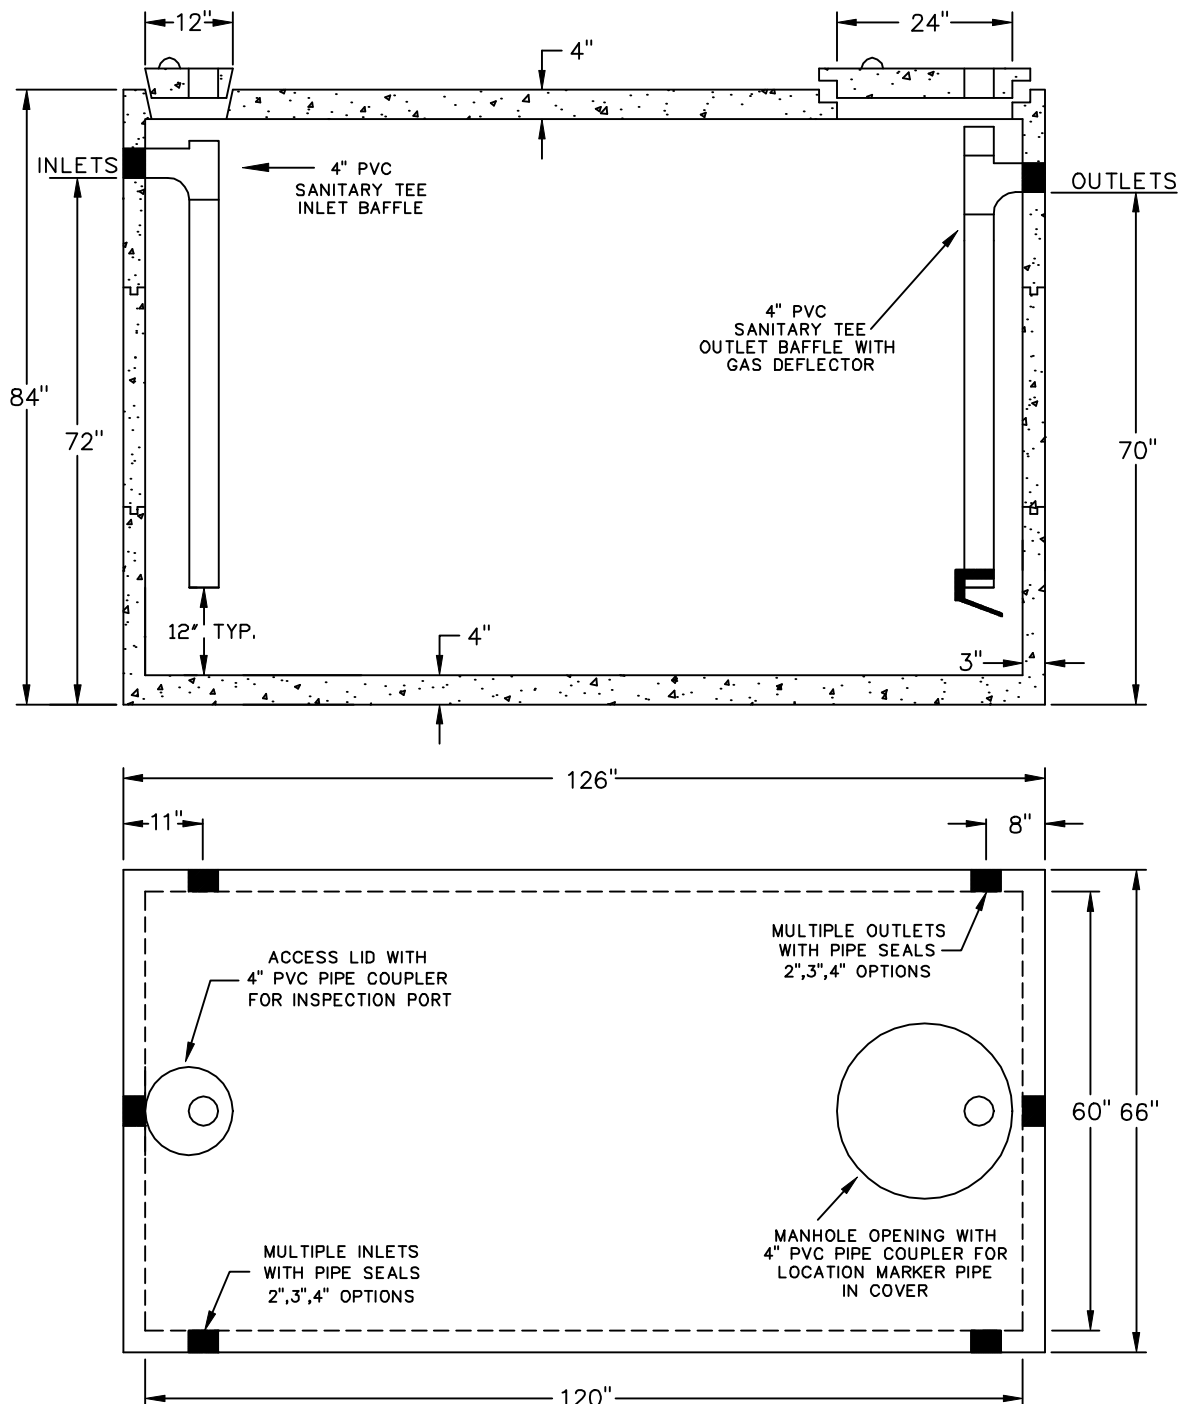

SPECIFICATIONS

SEPTECH™ NJ 2000 GALLON 1-COMPARTMENT GREASE TRAP

NJ2000GT

Minimum Concrete Strength – 4000 P.S.I. @ 28 Days

Reinforcement – #3 & #4 Rebar in Top; 6"x6"x10 Ga. wire mesh in Sides & Bottom

Secondary Reinforcement Synthetic Fibers Throughout

Construction Joint – Sealed with Conseal CS-101 Butyl Resin Sealant

Design – Grease Trap to be As Manufactured By:

FLEMINGTON PRECAST & SUPPLY, L.L.C.

18 Allen Street, Flemington, NJ 08822-1120

Ph. (908) 782-3246

Fax (908) 782-1981