


Date : 6/1/99

DWG #1300P

FLEMINGTON PRECAST & SUPPLY, L.L.C.

This Tank Meets or Exceeds The Requirements of N.J.A.C. 7:9A

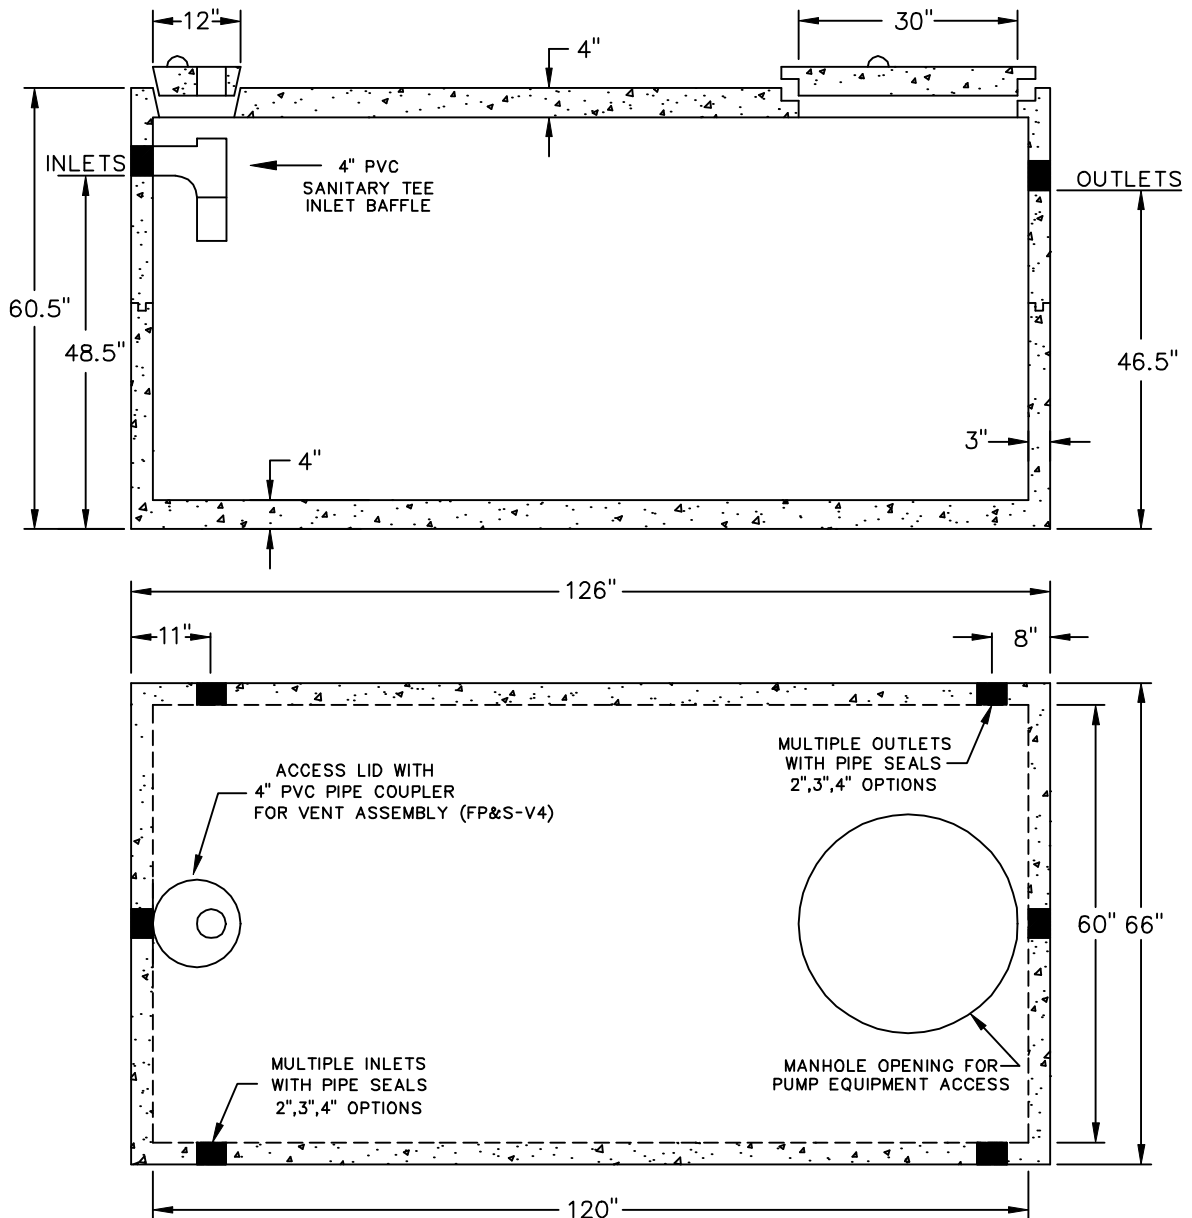

SPECIFICATIONS

SEPTECH™ NJ 1300 GALLON PUMP TANK

NJ1300P

Minimum Concrete Strength – 4000 P.S.I. @ 28 Days  
Reinforcement – #3 & #4 Rebar in Top; 6"x6"x10 Ga. wire mesh in Sides & Bottom  
Secondary Reinforcement Synthetic Fibers Throughout  
Construction Joint – Sealed with Conseal CS-101 Butyl Resin Sealant  
Design – Pump Tank to be As Manufactured By:  
**FLEMINGTON PRECAST & SUPPLY, L.L.C.**  
18 Allen Street, Flemington, NJ 08822-1120  
Ph. (908) 782-3246 Fax (908) 782-1981