


Date : 6/1/99

DWG #1500DP

FLEMINGTON PRECAST & SUPPLY, L.L.C.

This Tank Meets or Exceeds The Requirements of N.J.A.C. 7:9A

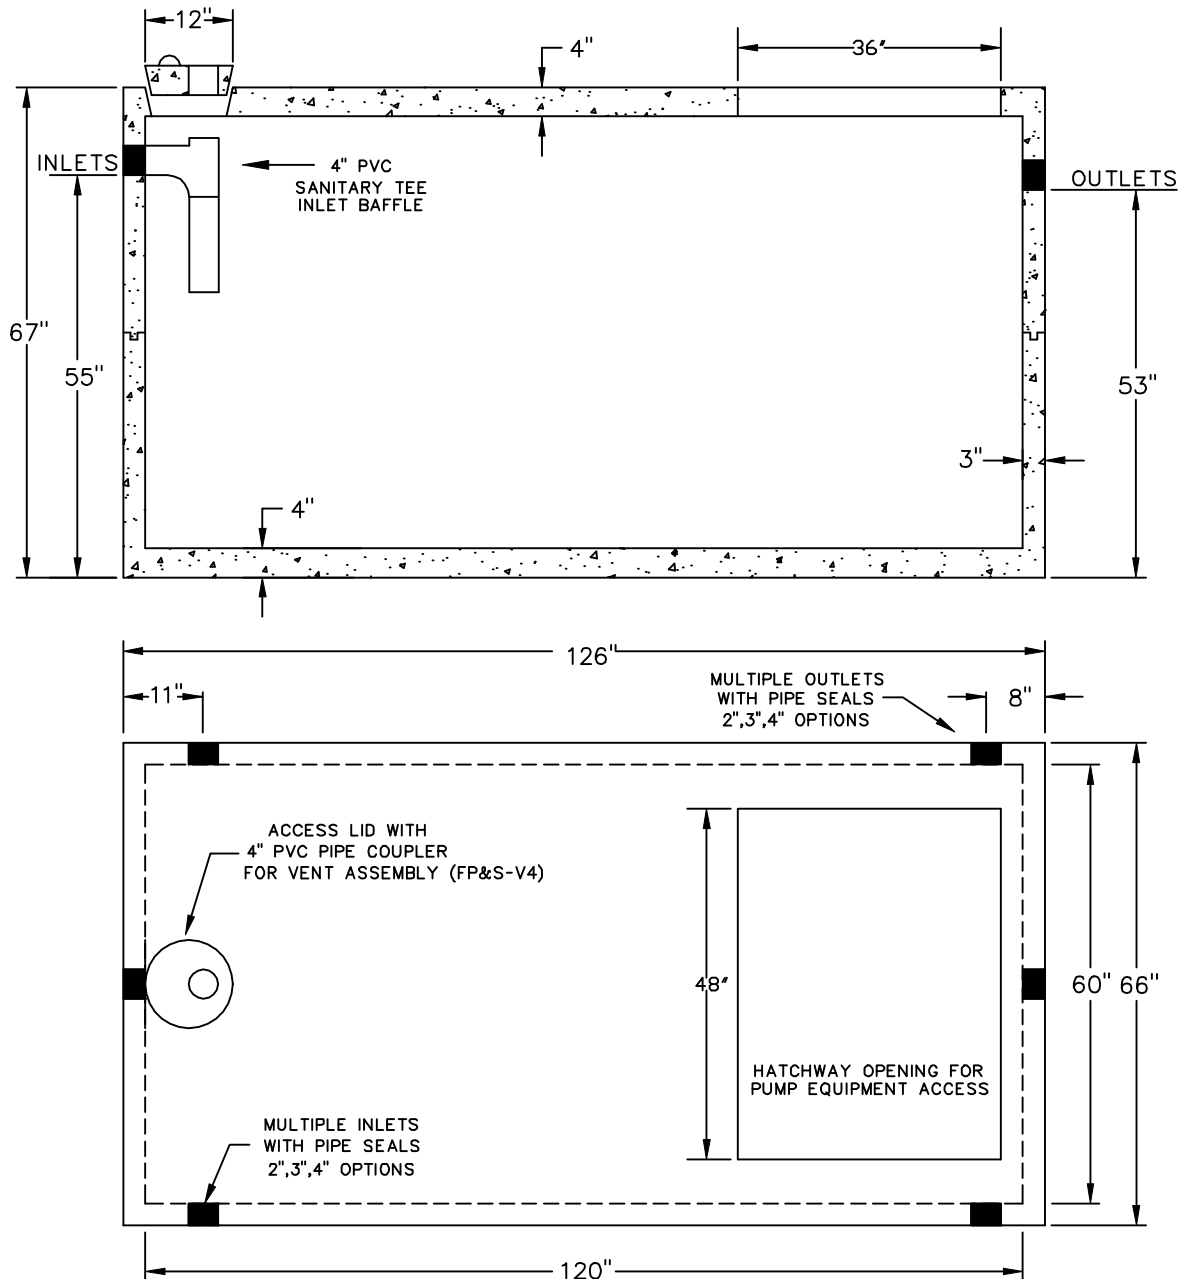

SPECIFICATIONS

SEPTech™ NJ 1500 GALLON DUPLEX PUMP TANK

NJ1500DP

Minimum Concrete Strength – 4000 P.S.I. @ 28 Days
 Reinforcement – #3 & #4 Rebar in Top; 6"x6"x10 Ga. wire mesh in Sides & Bottom
 Secondary Reinforcement Synthetic Fibers Throughout
 Construction Joint – Sealed with Con Seal CS-101 Butyl Resin Sealant
 Design – Duplex Pump Tank to be As Manufactured By:
FLEMINGTON PRECAST & SUPPLY, L.L.C.
 18 Allen Street, Flemington, NJ 08822-1120
 Ph. (908) 782-3246 Fax (908) 782-1981