

Date : 5/14/99

DWG #1752C

## FLEMINGTON PRECAST & SUPPLY, L.L.C.

This Tank Meets or Exceeds The Requirements of N.J.A.C. 7:9A

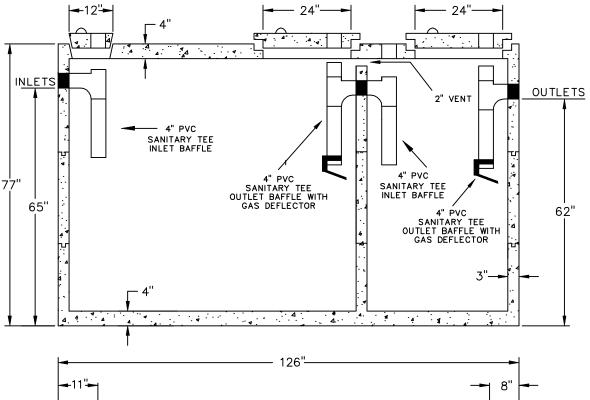

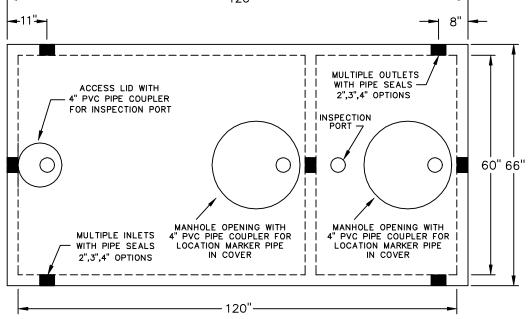

SPECIFICATIONS | SEPTECH<sup>™</sup> NJ 1750 GALLON 2-COMPARTMENT SEPTIC TANK

NJ1750S

Minimum Concrete Strength — 4000 P.S.I. @ 28 Days
Reinforcement — #3 & #4 Rebar in Top; 6"x6"x10 Ga. wire mesh in Sides & Bottom
Secondary Reinforcement Synthetic Fibers Throughout
Construction Joint — Sealed with Conseal CS—101 Butyl Resin Sealant
Design — Septic Tank to be As Manufactured By:

FLEMINGTON PRECAST & SUPPLY, L.L.C. 18 Allen Street, Flemington, NJ 08822-1120 Ph. (908) 782-3246 Fax (908) 782-1981