
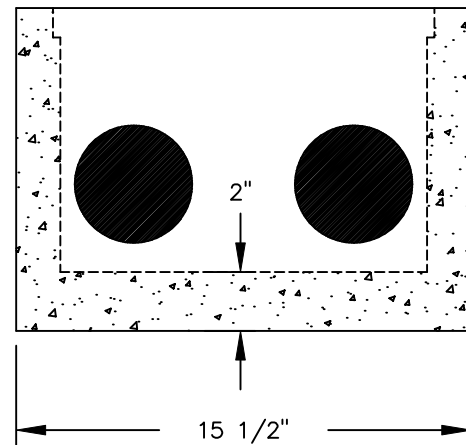
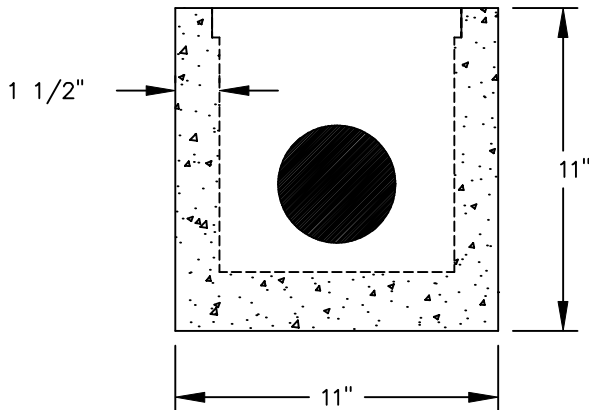
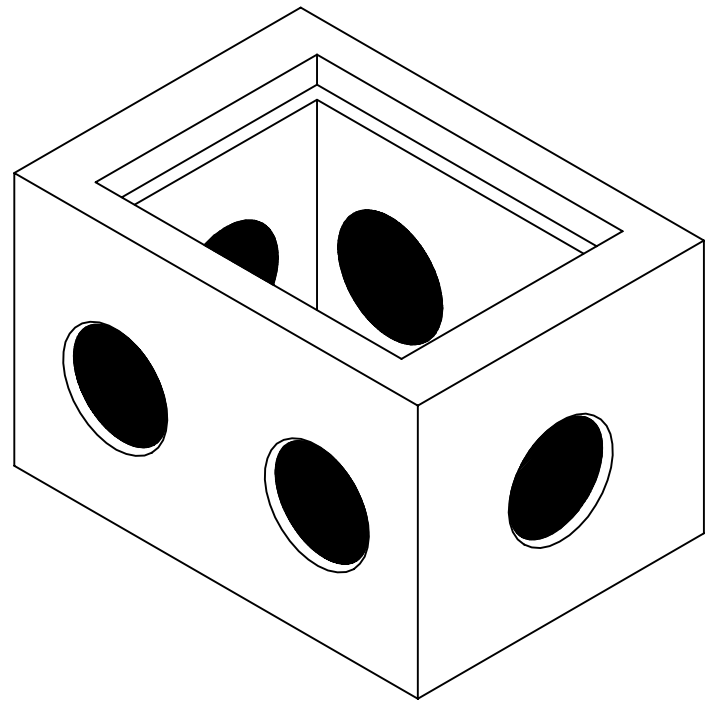


POLYPROPYLENE GRATE

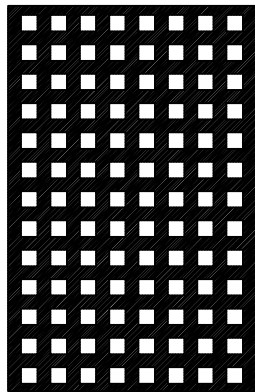

SPECIFICATIONS

RAIN DRAIN

RAIN-DR

Minimum Concrete Strength - 4000 P.S.I. @ 28 Days  
 Reinforcement - 6"x6"x10 Ga. wire mesh in Sides & Lid  
 Secondary Reinforcement Synthetic Fibers Throughout  
 Design - Rain Drain to be As Manufactured By:  
**FLEMINGTON PRECAST & SUPPLY, L.L.C.**  
 18 Allen Street, Flemington, NJ 08822-1120  
 Ph. (908) 782-3246 Fax (908) 782-1981